


バター脂肪酸 (メチルエステル)



Column : ULBON HR-SS-10 50 m x 0.25 mm I.D.
Column temp : 150 ~ 220 Program rate 3 /min
Split ratio : 60 : 1
Injection : 250
Detector : FID (250)
Carrier gas : He, 0.8 mL/min

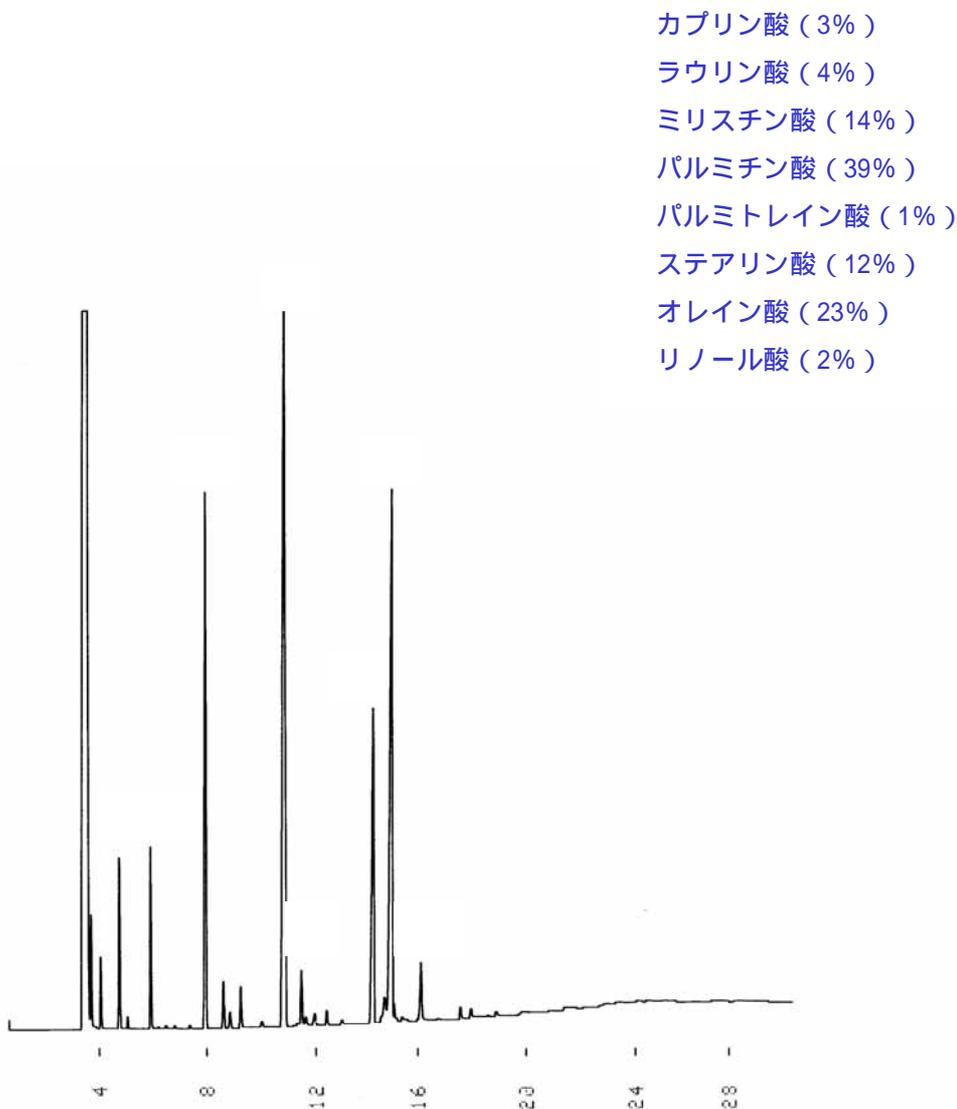